

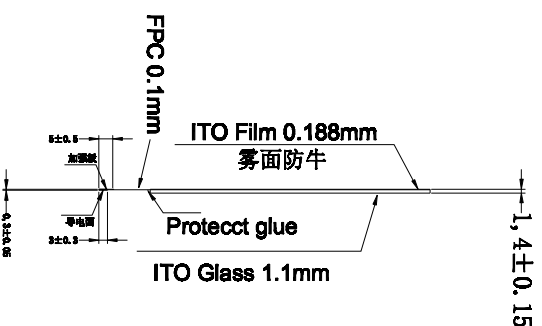


标示	更改内容	签名	日期
▲			

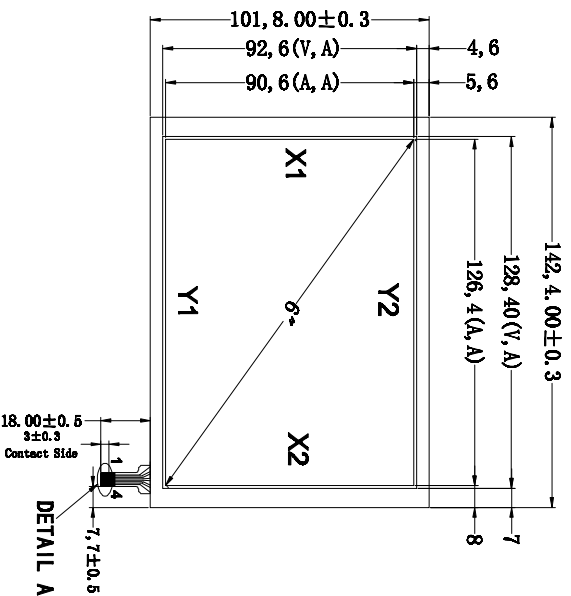

- Notes:
- 1.Type:ITO Glass+ITO Film+FPC
 - 2.Operating Voltage:≤10V
 - 3.Operation Temperature: -10℃~50℃
Storage Temperature:-30℃~80℃
 - 4.Life Time:>1,000,000 times
 - 5.Connect Material:FPC
 - 6.Response Time: ≤10ms
 - 7.Linearity: ≤1.5%
 - 8.Transmittance: ≥76%
 - 9.Surface Hardness: ≥3H(pencil)
 - 10.Operation force:60g~150g
 - 11.Resistance:X:481Ω-1176Ω
Y: 152Ω-370Ω



PIN	OUT	Contact Side
1	X1	Y2
2	Y1	X1
3	X2	X2
4	Y2	Y1

TOLERANCES
(UNLESS OTHERWISE STATED)
DECIMALS ANGLES 41.5%

180°-X-2.00MM	±0.20MM
120°-X-5.150MM	±0.30MM
90°-X-5.150MM	±0.50MM
45°-X-5.00MM	±0.40MM
30°-X-5.150MM	±0.20MM
<30MM	±0.10MM

绿成触控
GreenTouch

Shenzhen GreenTouch Technology Co.,Ltd

Model No.	Size	Ratio
GT-4V-6A-1	6"	4:3
Structure	Unit	Scale
G+T	mm	1:1
Design	Date	Page
李俊	2016.10.19	1/1
Check	Date	Version
付作军	2016.10.19	A0
Release	Date	
汪燕	2016.10.19	